

Installation instructions

For set # 7.1108 / 7.1118

90-96 300ZX/95-98 240SX

ENERGY
SUSPENSION

1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

Note: It is recommended that this set be professionally installed if you are unfamiliar with this type of work, and a factory service manual be purchased prior to performing any work on your vehicle for proper disassembly, reassembly and torque specs. These instructions are intended for bushing removal and install of Energy Suspension polyurethane bushings, once you have removed the factory component from your vehicle.

Front diff. position removal / install

I.D. of casting
is \varnothing 1.252"



Remove old rubber
from O.E.
cup washer.

Remove O.E. outer
metal shell, bushing
and inner sleeve.

Remove O.E.
rubber washer.




You must reuse O.E.
cup washer with
our polyurethane
top bushing.

← Top bushing P/N 2401

← Supplied sleeve
15.10.86.39
.750" x .500" x 1.700"

← Lower thrust washer
P/N 3114

Rear diff. position removal / install

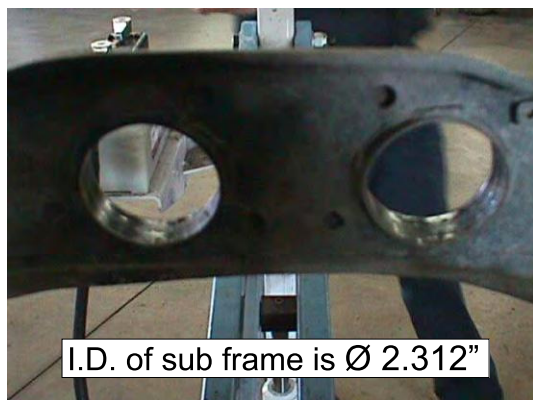

I.D. of sub frame is \varnothing 2.312"

Remove O.E. outer metal shell, bushing
and inner metal cup from sub frame.



O.E. bushing

P/N 4178
(4906 for
240sx)



O.E. inner metal cup
must be reused.

After installing our polyurethane bushings P/N 4178/4906,
reuse the inner metal cup from the O.E. bushings.

17295

24/FEB/03 BRH

© 2003 Energy Suspension. All rights reserved.
May not be reproduced, in any form, or by any means,
without the written consent of Energy Suspension.